

CERTIFICATE OF WAIVER OR AUTHORIZATION

ISSUED TO

Department of the Air Force – 432nd OG

Department of the Air Force – 432nd OG

4430 Grissom Ave Ste 206C

Nellis AFB, NV 89191

This certificate is issued for the operations specifically described hereinafter. No person shall conduct any operation pursuant to the authority of this certificate except in accordance with the standard and special provisions contained in this certificate, and such other requirements of the Federal Aviation Regulations not specifically waived by this certificate.

OPERATIONS AUTHORIZED

Operation of the MQ-9 Unmanned Aircraft System (UAS) in the NATCF Class A airspace, designated as Gorgon Stare, which is a 7nm radius centered off the INS TACAN, under the jurisdiction of Nellis Air Traffic Control (NATCF).

LIST OF WAIVED REGULATIONS BY SECTION AND TITLE

N/A

STANDARD PROVISIONS

1. A copy of the application made for this certificate shall be attached and become a part hereof.
2. This certificate shall be presented for inspection upon the request of any authorized representative of the Federal Aviation Administration, or of any State or municipal official charged with the duty of enforcing local laws or regulations.
3. The holder of this certificate shall be responsible for the strict observance of the terms and provisions contained herein.
4. This certificate is nontransferable.

Note-This certificate constitutes a waiver of those Federal rules or regulations specifically referred to above. It does not constitute a waiver of any State law or local ordinance.

SPECIAL PROVISIONS

Special Provisions are set forth and attached.

This certificate 2011-WSA-58-COA-R is effective from August 3, 2011 to August 2, 2012, and is subject to cancellation at any time upon notice by the Administrator or his/her authorized representative.

BY DIRECTION OF THE ADMINISTRATOR



FAA Headquarters, AJV-13

(Region)

For: Dean E. Fulmer

(Signature)

August 2, 2011

(Date)

Acting Manager, Unmanned Aircraft Systems

(Title)

ATTACHMENT to FAA FORM 7711-1

Issued To: Department of the Air Force – 432nd OG

Address: Airspace Management Office
4430 Grissom Ave Ste 206C
Nellis AFB, NV 89191

Activity: Operation of the MQ-9 Unmanned Aircraft System (UAS) in the NATCF Class A airspace, designated as Gorgon Stare, which is a 7nm radius centered off the INS TACAN, under the jurisdiction of Nellis Air Traffic Control (NATCF).

Purpose: To prescribe UAS operating requirements (outside of restricted and/or warning area airspace) in the National Airspace System (NAS) for the purpose of training and/or operational flights.

Dates of Use: This Certificate of Authorization (COA) 2011-WSA-58-COA-R is valid from August 3, 2011 through August 2, 2012. Should a renewal become necessary, the proponent shall advise the Federal Aviation Administration (FAA), in writing, no later than 60 days prior to the requested effective date.

General Provisions:

- The review of this activity is based on our current understanding of UAS operations, and the impact of such operations in the NAS, and therefore should not be considered a precedent for future operations. As changes occur in the UAS industry, or in our understanding of it, there may be changes to the limitations and conditions for similar operations.
- All personnel connected with the UAS operation must comply with the contents of this authorization and its provisions.
- This COA will be reviewed and amended as necessary to conform to changing UAS policy and guidance.

Safety Provisions:

Unmanned Aircraft (UA) have no on-board pilot to perform see-and-avoid responsibilities, and therefore, when operating outside of restricted areas, special provisions must be made to ensure an equivalent level of safety exists for operations had a pilot been on board. In accordance with 14 CFR Part 91, General Operating and Flight Rules, Subpart J-Waivers, 91.903, Policy and Procedures, the following provisions provide acceptable mitigation of 14 CFR Part 91.111/113 and must be complied with:

- For the purpose of see-and-avoid, visual observers must be utilized at all times except in Class A airspace, restricted areas, and warning areas. The observers may

either be ground based or in a chase plane. If the chase aircraft is operating more than 100ft above/below and or ½ nm laterally, of the UA, the chase aircraft PIC will advise the controlling ATC facility.

- In order to comply with the see and avoid requirements of Title 14 of the Code of Federal Regulations sections 91.111 and 91.113, the pilot-in-command and visual observers must be able to see the aircraft and the surrounding airspace throughout the entire flight; and be able to determine the aircraft's altitude, flight path and proximity to traffic and other hazards (terrain, weather, structures) sufficiently to exercise effective control of the aircraft to give right-of-way to other aircraft, and to prevent the aircraft from creating a collision hazard.
- UAS pilots will ensure there is a safe operating distance between manned and unmanned aircraft at all times in accordance with 14 CFR 91.111, *Operating Near Other Aircraft*, and 14 CFR 91.113, *Right-of-Way Rules*. Cloud clearances and VFR visibilities for Class E airspace will be used regardless of class of airspace. Additionally, UAS operations are advised to operate well clear of all known manned aircraft operations.
- The dropping or spraying of aircraft stores, or carrying of hazardous materials (included ordnance) outside of active Restricted, Prohibited, or Warning Areas is prohibited unless specifically authorized in the Special Provisions of this COA.

Airworthiness Certification Provisions:

- UA must be shown to be airworthy to conduct flight operations in the NAS.
- Public Use Aircraft must contain one of the following:
 - A civil airworthiness certification from the FAA, or
 - A statement specifying that the Department of Defense Handbook "Airworthiness Certification Criteria" (MIL-HDBK-516), as amended, was used to certify the aircraft or
 - Equivalent method of certification.

Pilot / Observer Provisions:

- **Pilot Qualifications:** UA pilots interacting with Air Traffic Control (ATC) shall have sufficient expertise to perform that task readily. Pilots must have an understanding of and comply with Federal Aviation Regulations and Military Regulations applicable to the airspace where the UA will operate. Pilots must have in their possession a current second class (or higher) airman medical certificate that has been issued under 14 CFR 67, Medical Standards and Certification, or a military equivalent. 14 CFR 91.17, Alcohol or Drugs, applies to UA pilots.
- Aircraft and Operations Requirements:
 - Flight Below 18,000 Feet Mean Sea Level (MSL).
 - UA operations below 18,000 feet MSL in any airspace generally accessible to aircraft flying in accordance with visual flight rules (VFR) require visual observers, either airborne or ground-based. Use of ATC radar alone does not constitute sufficient collision risk mitigation in airspace where uncooperative airborne operations may be conducted.

- Flights At or Above 18,000 Feet Mean Sea Level (MSL)
 - When operating on an instrument ATC clearance, the UA pilot-in-command must ensure the following:
 1. An ATC clearance has been filed, obtained and followed.
 2. Positional information shall be provided in reference to established NAS fixes, NAVAIDS, and waypoints. Use of Latitude/Longitude is not authorized.
- **Observer Qualifications:** Observers must have been provided with sufficient training to communicate clearly to the pilot any turning instructions required to stay clear of conflicting traffic. Observers will receive training on rules and responsibilities described in 14 CFR 91.111, *Operating Near Other Aircraft*, 14 CFR 91.113, *Right-of-Way Rules*, cloud clearance, in-flight visibility, and the pilot controller glossary including standard ATC phraseology and communication. Observers must have in their possession a current second class (or higher) airman medical certificate that has been issued under 14 CFR 67, Medical Standards and Certification, or a military equivalent. 14 CFR 91.17, Alcohol or Drugs, applies to UA observers.
- **Pilot-in-Command (PIC) –**
 - **Visual Flight Rules (VFR) as applicable:**
 - The PIC is the person directly responsible for the operation of the UA. The responsibility and authority of the pilot in command as described by 14 CFR 91.3 (or military equivalent), applies to the UAS PIC.
 - The PIC operating a UA in line of sight must pass at a minimum the required knowledge test for a private pilot certificate, or military equivalent, as stated in 14 CFR 61.105, and must keep their aeronautical knowledge up to date.
 - There is no intent to suggest that there is any requirement for the UAS PIC to be qualified as a crewmember of a manned aircraft.
 - Pilots flying a UA on other than instrument flight plans beyond line of sight of the PIC must possess a minimum of a current private pilot certificate, or military equivalent in the category and class, as stated in 14 CFR 61.105.
 - **Instrument Flight Rules (IFR) as applicable:**
 - The PIC is the person directly responsible for the operation of the UA. The responsibility and authority of the pilot in command as described by 14 CFR 91.3 (or military equivalent), applies to the UAS PIC.
 - The PIC must be a certified pilot (minimum of private pilot) of manned aircraft (FAA or military equivalent) in category and class of aircraft flown.
 - The PIC must also have a current/appropriate instrument rating (manned aircraft, FAA or military equivalent) for the category and class of aircraft flown.
- **Pilot Proficiency – VFR/IFR as applicable:**
 - Pilots will not act as a VFR/ IFR PIC unless they have had three qualified proficiency events within the preceding 90 days.

- The term “qualified proficiency event” is a UAS-specific term necessary due to the diversity of UAS types and control systems.
- A qualified proficiency event is an event requiring the pilot to exercise the training and skills unique to the UAS in which proficiency is maintained.
- Pilots will not act as an IFR PIC unless they have had six instrument qualifying events in the preceding six calendar months (an event that requires the PIC to exercise instrument flight skills unique to the UAS).

- **PIC Responsibilities:**
 - Pilots are responsible for a thorough preflight inspection of the UAS. Flight operations will not be undertaken unless the UAS is airworthy. The airworthiness provisions of 14 CFR 91.7, Civil Aircraft Airworthiness, or the military equivalent, apply.
 - One PIC must be designated at all times and is responsible for the safety of the UA and persons and property along the UA flight path.
 - The UAS pilot will be held accountable for controlling their aircraft to the same standards as the pilot of a manned aircraft. The provisions of 14 CFR 91.13, *Careless and Reckless Operation*, apply to UAS pilots.

- **Pilot/Observer Task Limitations:**
 - Pilots and observers must not perform crew duties for more than one UA at a time.
 - Chase aircraft pilots must not concurrently perform either observer or UA pilot duties along with chase pilot duties.
 - Pilots are not allowed to perform concurrent duties both as pilot and observer.
 - Observers are not allowed to perform concurrent duties both as pilot and observer.

Standard Provisions: These provisions are applicable to all operations unless indicated otherwise in the Special Provisions section.

- The UA PIC will maintain direct two-way communications with ATC and have the ability to maneuver the UA per their instructions, unless specified otherwise in the Special Provisions section. The PIC shall comply with all ATC instructions and/or clearances.
- If equipped, the UA shall operate with an operational mode 3/A transponder, with altitude encoding, or mode S transponder (preferred) set to an ATC assigned squawk.
- If equipped, the UA shall operate with position/navigation lights on at all times during flight.
- The UA PIC shall not accept any ATC clearance requiring the use of visual separation or sequencing.
- VFR cloud clearances and visibilities for Class E airspace will be used regardless of class of airspace the UAS is operating in, except when operating in Class A airspace where 14 CFR Part 91.155 will apply.
- Special VFR is not authorized.

- Operations (including lost link procedures) shall not be conducted over populated areas, heavily trafficked roads, or an open-air assembly of people.
- Operations outside of restricted areas, warning areas, prohibited areas (designated for aviation use) and/or Class A airspace may only be conducted during daylight hours, unless authorized in the Special Provisions section.
- Operations shall not loiter on Victor airways, Jet Routes, Q Routes, IR Routes, or VR Routes. When necessary, transit of airways and routes shall be conducted as expeditiously as possible.
- Operations conducted under VFR rules shall operate at appropriate VFR altitudes for direction of flight (14 CFR 91.159).
- The UA PIC or chase plane PIC (whichever is applicable) will notify ATC of any in flight emergency or aircraft accident as soon as practical.
- All operators that use GPS as a sole source must check all NOTAMs and Receiver Autonomous Integrity Monitoring (RAIM). Flight into GPS test area or degraded RAIM is prohibited without specific approval in the special provisions.
- At no time will TCAS be used in any mode while operating an unmanned aircraft.
- Only one UA will be flown in the operating area unless indicated otherwise in the Special Provisions.
- A copy of this COA will be maintained on site by the PIC or designated representative.
- The Department of the Air Force – 432nd OG, and/or its representatives, is responsible at all times for collision avoidance with non-participating aircraft and the safety of persons or property on the surface with respect to the UAS.

Special Provisions:

1. In the event of a lost link, the UAS pilot will immediately notify NATCF at 702-652-4172, state pilot intentions, and comply with the following provisions:
 - The aircraft will comply with the Lost Link provisions depicted in Attachment 2 of this document.
 - If lost link occurs within a restricted or warning area, or the lost link procedure above takes the UA into the restricted or warning area – the aircraft will not exit the restricted or warning areas until the link is re-established.
 - The UA lost link mission will not transit or orbit over populated areas.
 - When outside of restricted/warning area airspace, lost link programmed procedures will avoid unexpected turn-around and/or altitude changes and will provide sufficient time to communicate and coordinate with ATC.
 - Lost link orbit points shall not coincide with the centerline of Victor airways.
2. Operations with live ordnance are prohibited outside of restricted airspace.
3. Operations over densely populated areas are prohibited.
4. The MQ-9 UA must be operated in strict compliance with all provisions and conditions contained in the Airworthiness Release, including all appendices.

5. A copy of this COA, including the special limitations must be at the site whenever UA operations are UA operations are being conducted. The PIC and visual observer must read the COA including the special provisions, and must adhere to the contents and special provisions in the COA.
6. When operating over US highway 95 and the adjacent power lines, the UA must be at an altitude and position allowing, if a power unit fails, an emergency landing to be accomplished without undue hazards to persons or property on the surface.
7. All crewmembers including PIC and visual observers must receive training under the direct supervision of a qualified instructor.
8. Sterile cockpit procedures must be observed during critical phases of flight.
9. The use of cell phones or other telephonic communication must not be used unless required for the operational control of the UA and any required communications with Air Traffic Control.
10. The holder of this COA, or delegated representative, is responsible for halting or canceling activity in the approved flight area if, at any time, the safety of persons or property on the ground or in the air is in jeopardy, or if there is a failure to comply with the terms or conditions of this authorization.
11. Any visual observer, sensor operator, or other person charged with providing collision avoidance for the MQ-9 Reaper UAS must have immediate communication with the pilot-in-command (PIC).
12. The PIC must conduct a pre-takeoff briefing which includes a briefing on the contents of the COA, the maximum altitudes to be flown, initial heading, frequencies to be used, lost link procedures, the parameters for the use of a ditch point, hazards unique to the flight being flown, emergency procedures on takeoff and landing, a briefing on the amount of fuel/flight time remaining including a reserve on the UA, and any other briefing requirements.
13. A frequency integrity check must be conducted prior to the launch of the UA.
14. Visual observers must maintain visual contact with the UA at all times while scanning the intermediate environment for potentially conflicting traffic. AT no time will the visual observer permit the unmanned aircraft to operate beyond line-of-sight.
15. The UA must be at an altitude and position allowing, if a power unit fails, an emergency landing can be accomplished back to the runway without undue hazards to persons or property on the surface.

16. The Department of the Air Force is responsible to ensure the safety of flight and adequate visual range coverage to mitigate any potential collisions with manned and unmanned aircraft and hazards to persons on the ground.
17. By accepting this COA, the Department of the Air Force has authorized the Federal Aviation Administration (FAA) to conduct site evaluations at the operating location of this COA.
18. The Federal Aviation Administration has the authority to cancel this COA or delay any activities if the safety of persons or property on the ground or in the air is in jeopardy, or if there is a violation of the terms specified.

NOTAM: A distance (D) Notice to Airmen shall be issued when UA operations are being conducted. This requirement may be accomplished through your local base operations or NOTAM issuing authority. You may also complete this requirement by contacting Flight Service Station at 1-877-4-US-NTMS (1-877-487-6867) not more than 72 hours in advance, but not less than 48 hours prior to the operation and provide:

- Name and Address of pilot filing NOTAM request
- Location, Altitude or the operating Area
- Time and nature of the activity


NOTE FOR PROPONENTS FILING THEIR NOTAM WITH DoD ONLY: This requirement to file with the AFSS is in addition to any local procedures/requirements for filing through DINS. The FAA Unmanned Aircraft Systems Office is working with the AFSS, and to eliminate the requirement to file a NOTAM with both the AFSS and DINS in the near future.

Incident / Accident and Normal Reporting Provisions: The following information is required to document routine and unusual occurrences associated with UAS activities in the NAS.

- The proponent for the COA shall provide the following information to Donald.E.Grampp@faa.gov on a monthly basis:
 - Number of flights conducted under this COA.
 - Pilot duty time per flight.
 - Unusual equipment malfunctions (hardware/software).
 - Deviations from ATC instructions.
 - Operational/coordination issues.
 - All periods of loss of link (telemetry, command and/or control)
- The following shall be submitted via COA Online, email or phone (202-385-4542, cell 443-569-1732) to Donald.E.Grampp@faa.gov **within 24 hours and prior to any additional flight under this COA:**
 - All accidents or incidents involving UAS activities, including lost link.
 - Deviations from any provision contained in the COA.

This COA does not, in itself, waive any Federal Aviation Regulation (FAR) nor any state law or local ordinance. Should the proposed operation conflict with any state law or local ordinance, or require permission of local authorities or property owners, it is the responsibility of the Department of the Air Force – 432nd OG to resolve the matter. This COA does not authorize flight within Special Use Airspace without approval from the Using Agency. The Department of the Air Force – 432nd OG is hereby authorized to operate the MQ-9 Unmanned Aircraft System in the operations area depicted in “Activity” above and attachment 1 below.

Red Circle: Gorgon Stare Operations area, which is a 7nm radius centered off the INS TACAN

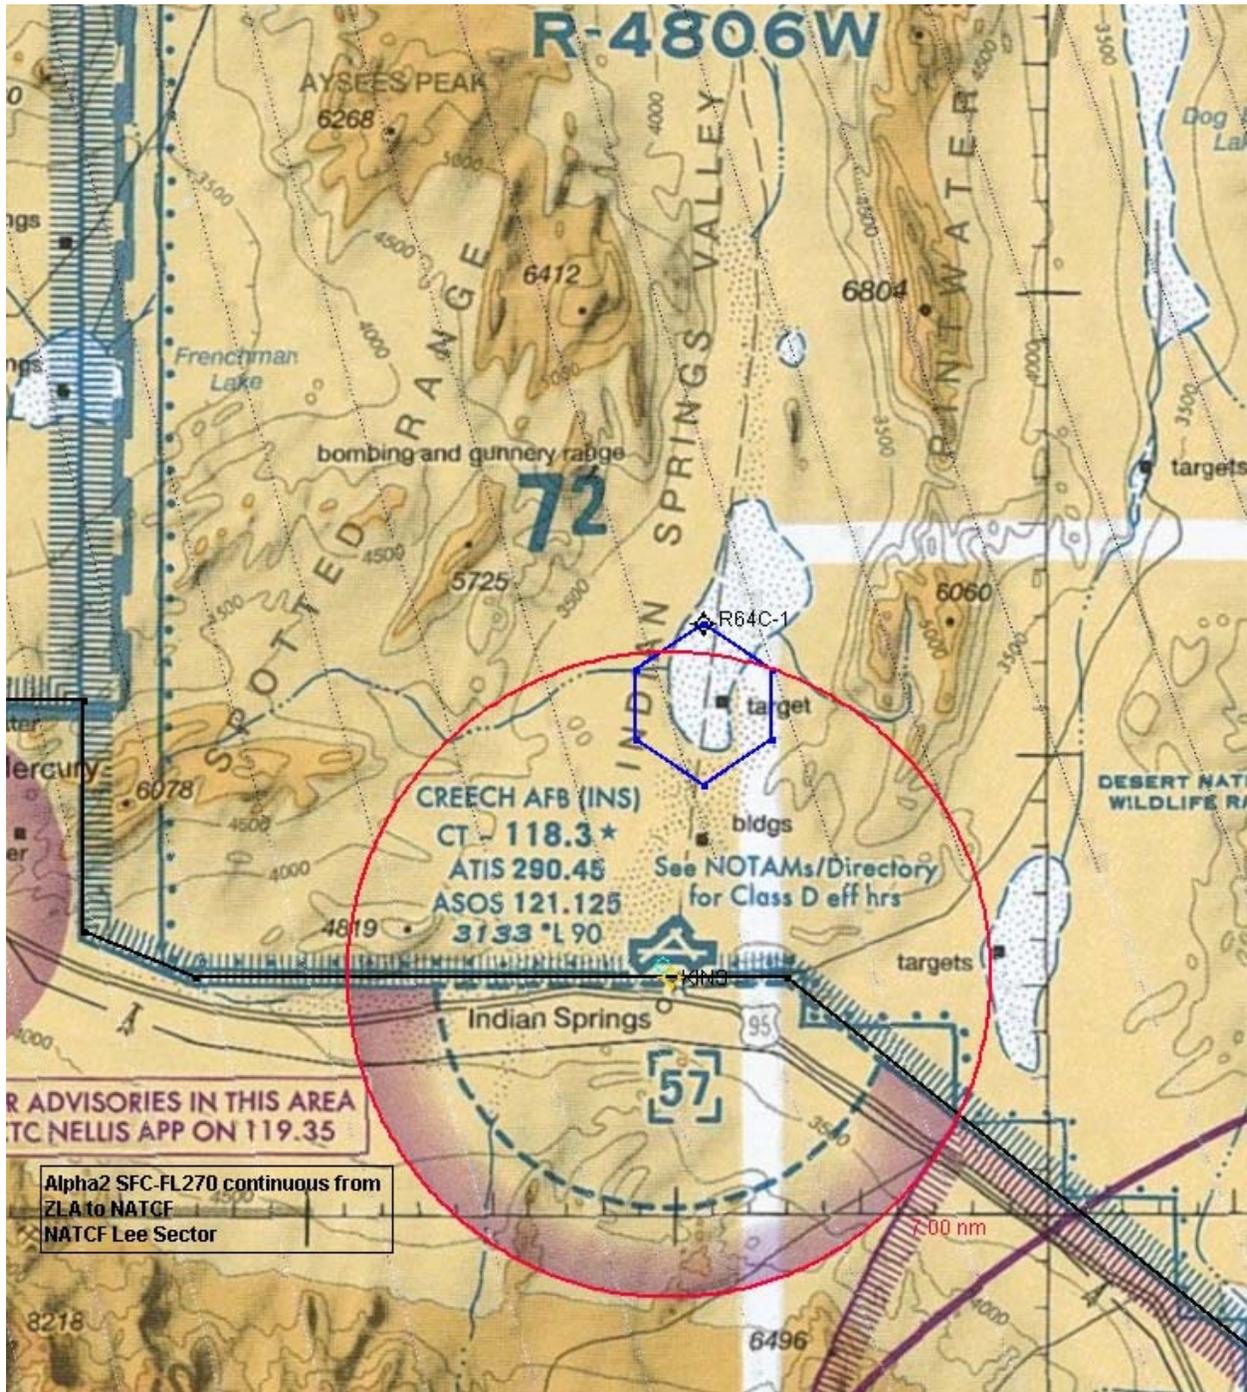

MQ-9 Lost Link Profile Description and Communication Capabilities

The MQ-9 follows a pre-set flight path after contact with the pilot is lost. When contact with the pilot is lost for 10 seconds, the MQ-9 initiates a lost link profile. The aircraft sets airspeed of 110 KIAS, and follows directions that had been inputted by the pilot for direction and altitude. The lost link direction and altitude can be inputted anytime the pilot is in control of the aircraft and as the aircraft progresses during flight, the pilot updates them to ensure it proceeds to the safest area (normally into a previously arranged restricted airspace). During lost link, the aircraft's IFF functions follow a pre-programmed plan which allows for them to be turned on or off or changed. Previous arrangements are made with each ATC as to what mode 3 they would like (i.e., 7700, 7600, maintain assigned) to have the aircraft send out during lost link, to provide identification to controllers on the status of the aircraft and that it is following a lost link profile. For this COA the aircraft will squawk 7600. When the aircraft reaches its pre-programmed holding area, the current standard is to have it hold for 30 minutes in a circular pattern, to allow for opportunities to re-establish contact with the aircraft by the pilot, then follows a previously inputted pilot directed flight path back to its originating station. Sometimes the holding pattern is set for longer periods of time due to previously identified airspace conflicts, etc., before starting its flight home. The key point to remember is that though the aircraft is not under direct control of the pilot, the pilot has mission planned and inputted all actions the aircraft undertakes and can readily relay those to ATC entities.

The MQ-9 pilot has more reliable communication capabilities from his ground station than any airborne aircraft because he is not reliant upon the aircraft's electrical systems working. The MQ-9 has a UHF/VHF/FM radio on board that the pilot normally uses for communication with ATC. He also has a UHF/VHF/FM radio in his ground station which provides limited communication capability, at least one telephone land line at his flight station, a cell phone and the unique ability to step out of the control station and use any land lines in the nearby buildings. Phone numbers for all ATC entities that are transited during flight are maintained in the mission kit that the pilot has for ready reference.

The aircraft's position in-flight and its lost link profile are overlaid on electronic charts that are part of what is referred to as the tracker display in the ground station. These charts freeze when contact with the aircraft is lost and the pilot has immediate reference to them for flight path and timing information for the aircraft's lost link profile. This allows for immediate and accurate transfer of that information to ATC entities.

The following describes lost link programming: (The aircraft is well within Line of Sight for the GCS greatly reducing the chance of Lost Link)

Prior to leaving R4806: The aircraft will orbit in restricted airspace until the link is reestablished.

After entering the Mission Orbit: The aircraft will remain in the approved mission orbit, within the ATC approved altitude block, for 30 minutes. If link is not reestablished it will exit the Orbit at a point within R4806 and enter the published Creech Lost Link orbit North of the airport. The aircraft will not depart the portion of the orbit that is outside restricted airspace enroute to the lost link orbit. Once the aircraft has departed the mission orbit it will not return without ATC approval.

R-64 Lost Link Orbit

- (1) N 36° 42' 41.00" W 115° 39' 16.00"
- (2) N 36° 41' 41.00" W 115° 37' 26.00"
- (3) N 36° 40' 10.00" W 115° 37' 26.00"
- (4) N 36° 39' 10.00" W 115° 39' 16.00"
- (5) N 36° 40' 10.00" W 115° 41' 08.00"
- (6) N 36° 41' 41.00" W 115° 41' 08.00"

