

Attachment 1: Aircraft, Control and Communications Systems

Reference: FAA AIR-160 UAPO Guidance Document 08-01

Maxi-Joker 2 Airframe

INL uses several types of light, under 55 lb, fixed wing and rotary airframes with a variety of 1 to 5 horse power electric, glow fuel, and gasoline piston engines. One rotorcraft is the Maxi-Joker 2, Photo 1. The MaxiJoker 2 is an electric helicopter with 1.8 m rotor diameter, and can lift a weight of 2 kg. Flight time is up to 20 minutes.



Figure 3: Electric rotary wing Maxi Joker 2 with autopilot and gimbale camera system.

Flight Control Systems and Ground Stations

The Maxi Joker 2 is remotely controlled using a waypoint autonomous/manual system from Cloud Cap Technologies, specifically the Piccolo II gimbaled autopilot and ground station packages. See www.cloudcaptech.com.

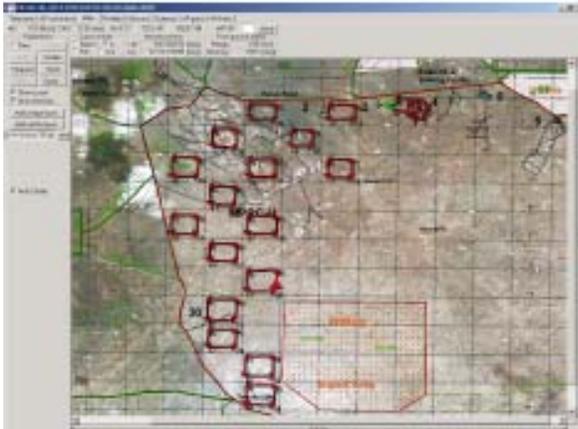


Photo 2: Cloud Cap Ground Station Software

Each flight of a single UA is controlled via a single ground station. However, extended flights may hand off control (and Pilot and Observer roles) from one ground station to another to allow constant line of sight over several miles. Photo 2 shows the Cloud Cap ground station software map with waypoint defined orbits in red. Waypoint autonomous flight uses an onboard GPS for navigation. UA locations are shown as icons on the map by downlinking GPS and other telemetry.

The Cloud Cap avionics package provides the capabilities of a high-end autopilot at a significantly lower cost. A standard autopilot system consists of the Piccolo II avionics and a ground control station.

Key features of the autopilot system include:

- Programmable GPS waypoint navigation
- Altitude and airspeed hold
- Auto Assist flight modes
- Full integration with 3-axis gyros, accelerometers, a GPS receiver, and pressure sensors all on a single circuit board
- Integrated 900 MHz RF link
- Ground and in-flight programmable flight plan
- Control of lights, parachute deployment, autonomous drop function, and brakes (to be exploited for camera control)
- Programmable flight termination

- Access to flight controls via secondary serial interface

Included with the autopilot system is ground-control software that offers the user a “... friendly point and click interface for mission planning” that runs on a Windows-based computer or laptop. If line-of-sight control is maintained, the software allows the operator to monitor and log vehicle telemetry data, change waypoints, upload new flight plans, initiate holding patterns, and adjust feedback loops, all while the UAV is in flight.

The INL has developed a mobile version of the ground control station to allow the UA PIC and Observer to follow UA flights to maintain line-of-sight. Photo 3 shows the mobile ground station.



Photo 3: Mobile UA Ground Station

Communications

Cloud Cap systems use unregulated (Instrumentation, Scientific & Medical ISM band) low power radio frequency links for command and control of the UA from the ground. The INL also has an onsite dedicated cellular communication infrastructure for research and development. It may be used as the communications medium. The INL may also use military or other frequency radios during R&D. If so, all frequencies used are approved by the INL site frequency manager. The INL is an National

Idaho National Laboratory FAA UA Certificate of Authorization Application 07/11/08

Telecommunications and Information Administration (NTIA, federal executive branch agency)

Wireless Experimental Station and its RF spectrum is managed in accordance with NTIA's rules and regulation for emittance of RF energy.